

SunBond®

UV resistant sewing thread



Tents, Soils, Awnings, Marine & Automotive

100% bonded filament Polyester sewing thread with advanced UV protection. Specifically Engineered for high UV resistance in outdoor applications.



Polyfab Middle East Trading LLC
PO Box 450008
Jebel Ali, Dubai
United Arab Emirates
Email: info@polyfab.ae
Telephone: +971 4 884 7933
Facsimile: +971 4 884 7934
www.polyfab.com.au



SunBond®

UV resistant sewing thread




SunBond® is available in 8 colors. All colours without obligation



White	7003U	●	●
Yellow	7466U		●
Red	7905U	●	●
Blue	8421U	●	●
Green	8847U		●
Beige	7622U	●	●
Grey	7090U		●
Black	7020U	●	●

● Sunbond 15
● Sunbond 20

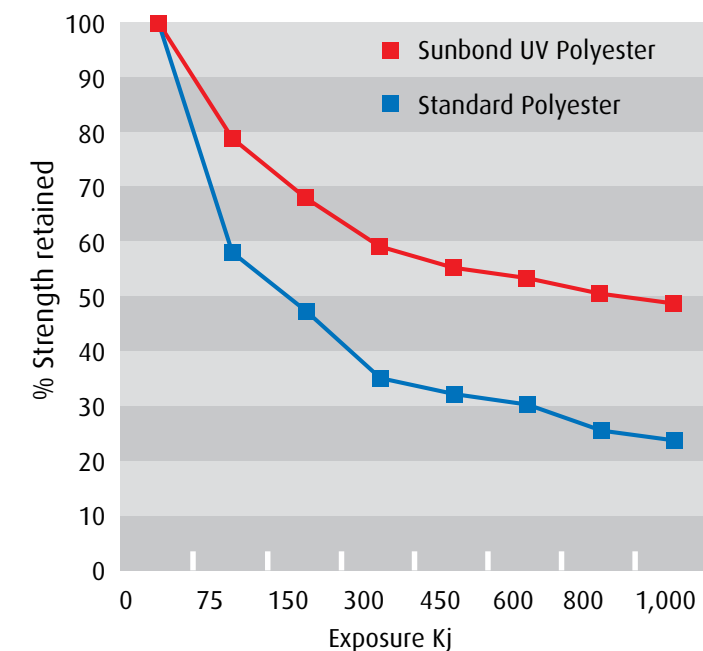

SunBond® is a quality and high UV resistant special sewing thread made from 100% bonded continuous filament polyester with UV-stabilizer.

Applications*:

For outdoor application like the awning, tent and sailing industry using heavier material. Due to its bonded lubrication, SunBond® will not unravel and therefore is especially recommended for multidirectional sewing.

- High performance bonded special sewing thread for outdoor applications
- Extremely durable
- Resistant to untwisting and therefore suited for multidirectional sewing
- Outstanding UV resistance due to special dye stuffs



Technical Specifications

	SunBond 15	SunBond 20
Tex No	210	135
Spool Length	1850 m	2750 m
Weight	0.50 kg	0.50 kg
Spools per box	6	6
Needle size	23-24	19-22
Breaking force	13200 cN	9060 cN
Linear density	782 * 3 dtex	552 * 3 dtex
Elongation at break	22%	19%
Colour fastness to light	≥5	≥4

Product Disclaimer:

Due to the application field there is no need of wash and care labelling.

The recommendations and descriptions set herein are provided in good faith, but without any implied warranty of merchantability or fitness. Since conditions and applications vary considerably by purchaser, POLYFAB cannot be responsible for any damages, including consequential damages, of any kind that may result to the purchaser.

The purchaser should perform preliminary testing to ensure that the thread is suitable for the desired purpose, including testing to ensure dye fastness.

Polyfab is providing this colour chart for your convenience. This colour card is not a warranty and in no way shall create any legal obligation on the part of Polyfab. The colours shown on the colour card may vary in tone for the actual thread.



Aram Gulf Co.
Eastern Ring – Al Faisaliah, Riyadh, Saudi Arabia
t: +966 920035411 • e: info@aramgulf.net
www.aramgulf.net